

Fig. 1

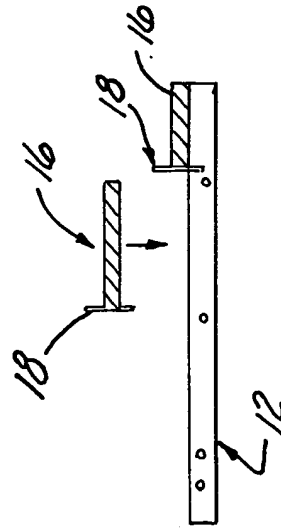


Fig. 2

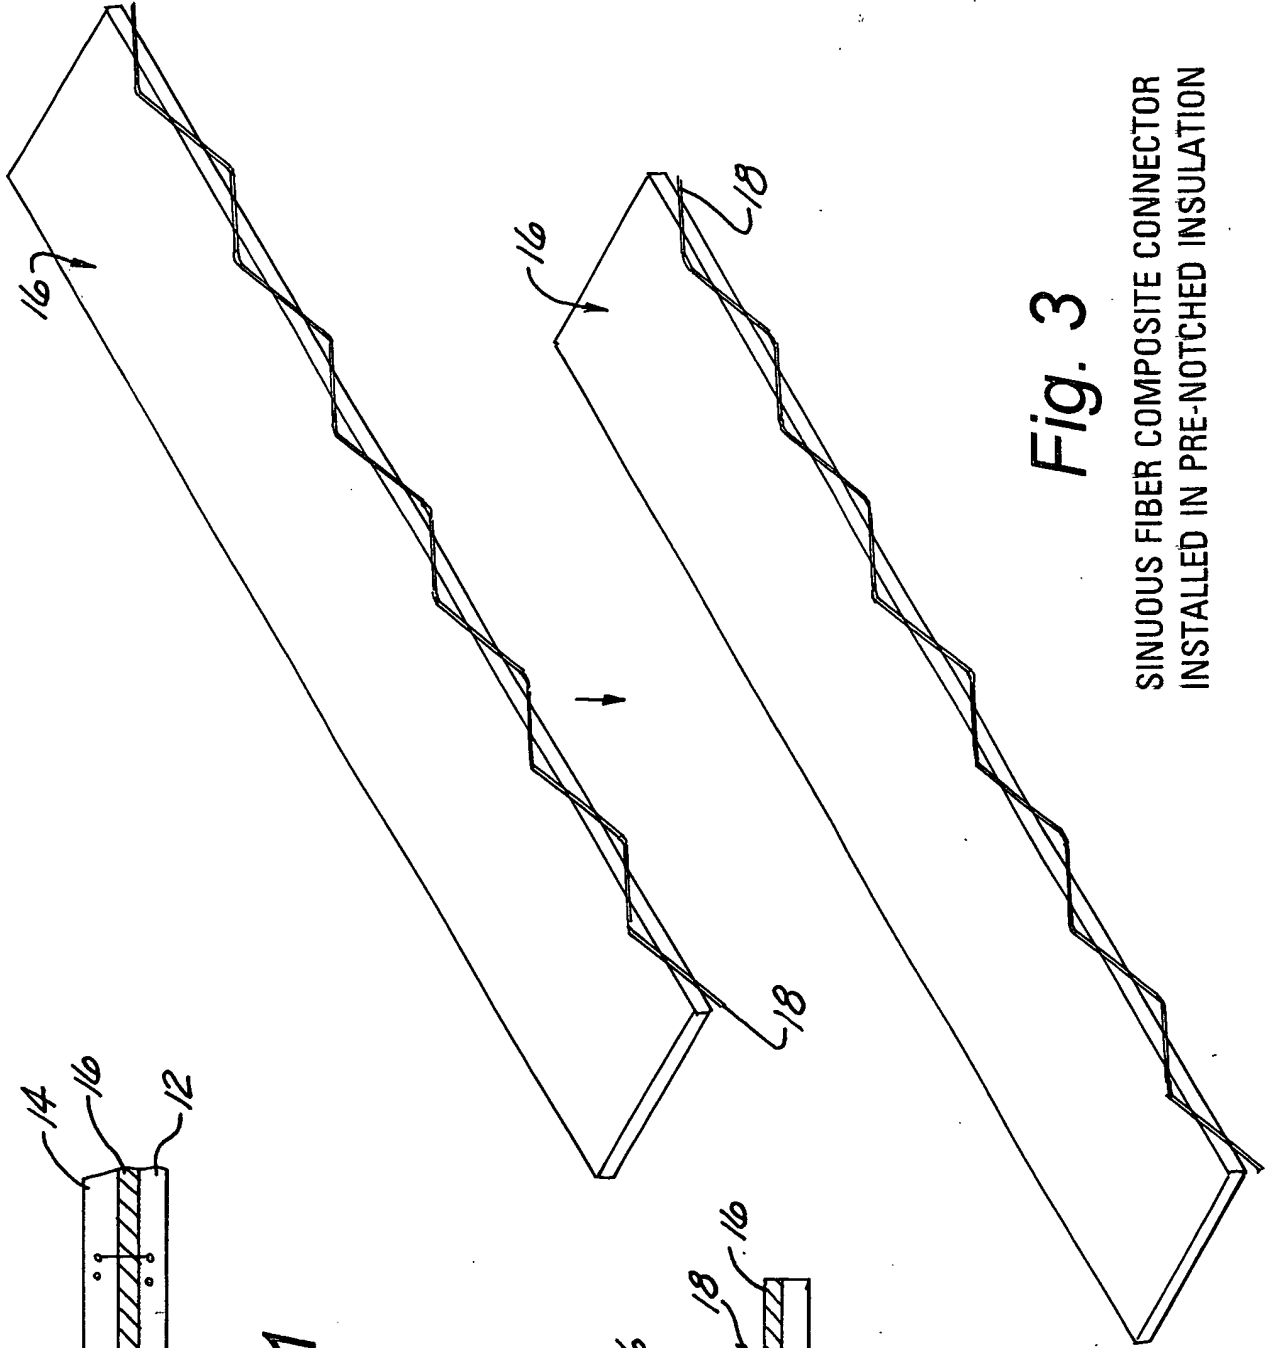


Fig. 3

SINUOUS FIBER COMPOSITE CONNECTOR
INSTALLED IN PRE-NOTCHED INSULATION

+

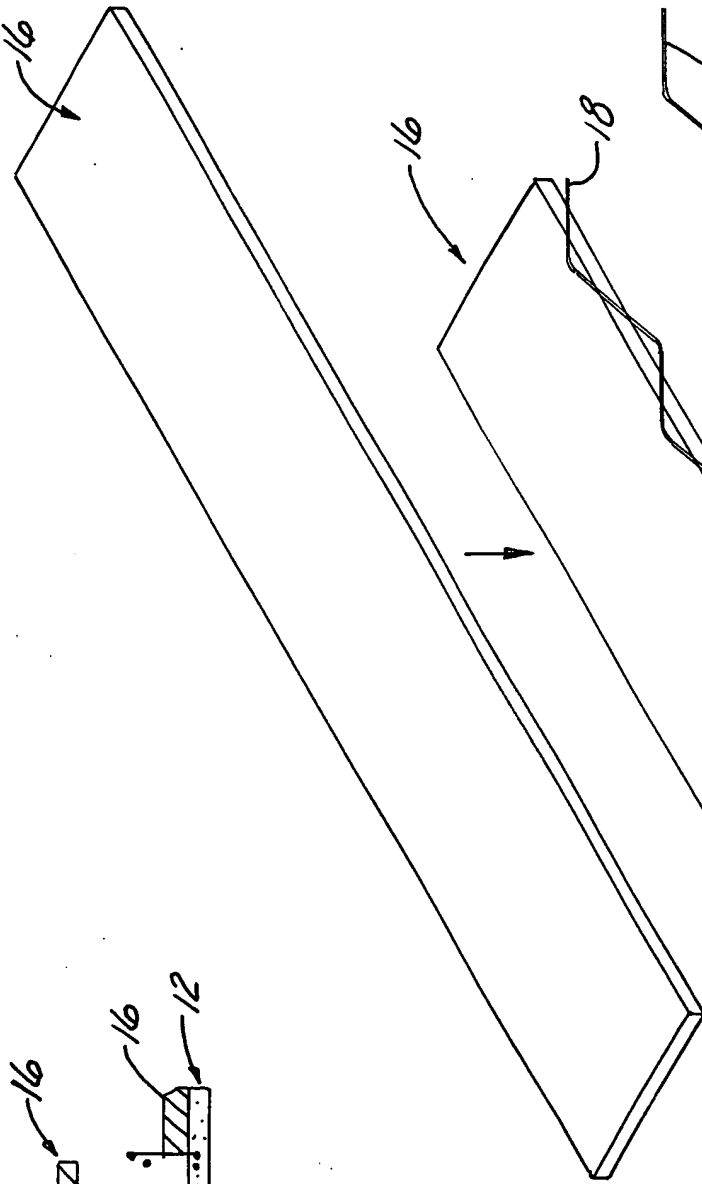


Fig. 4

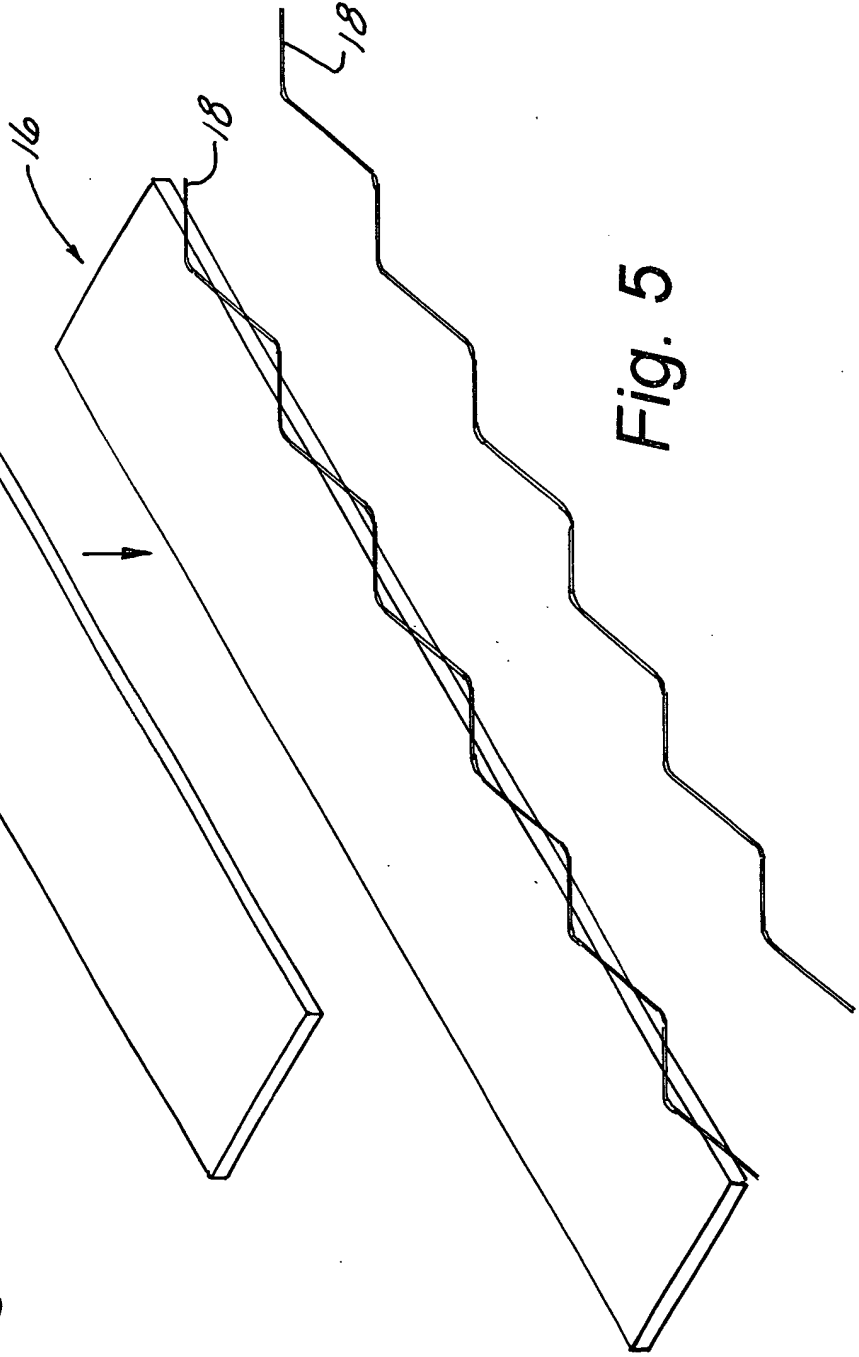


Fig. 5

+

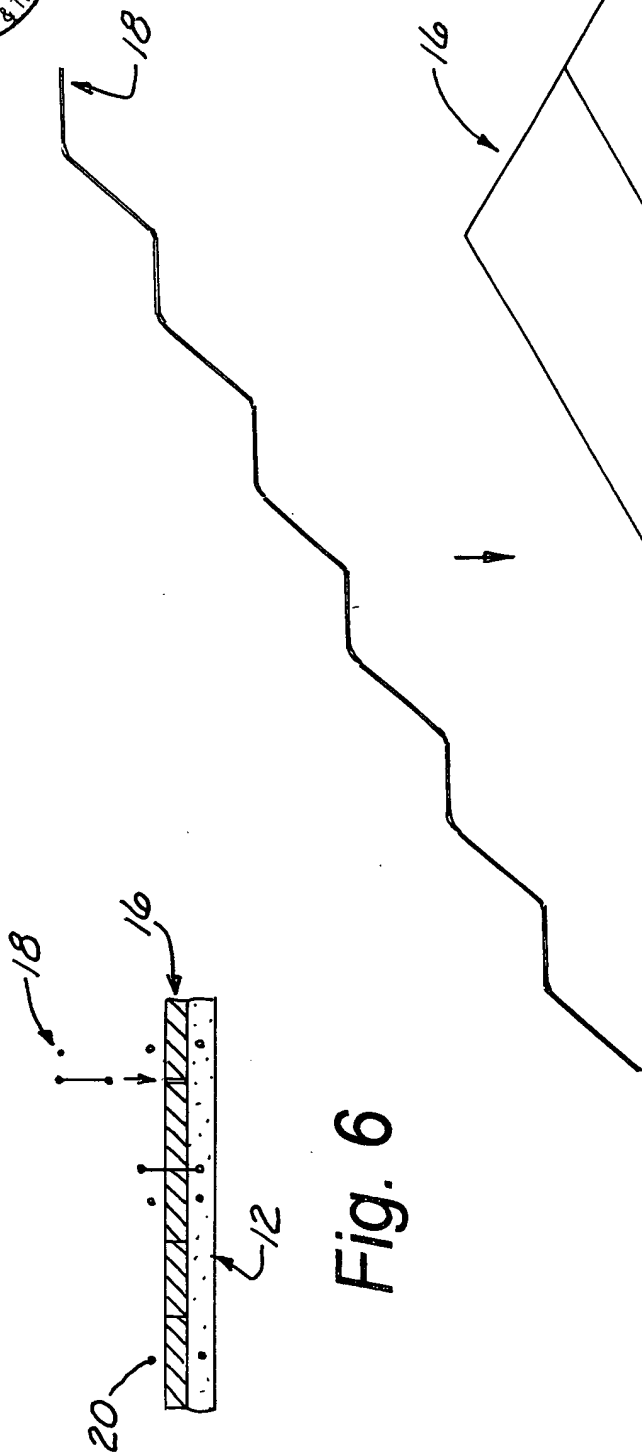



Fig. 6



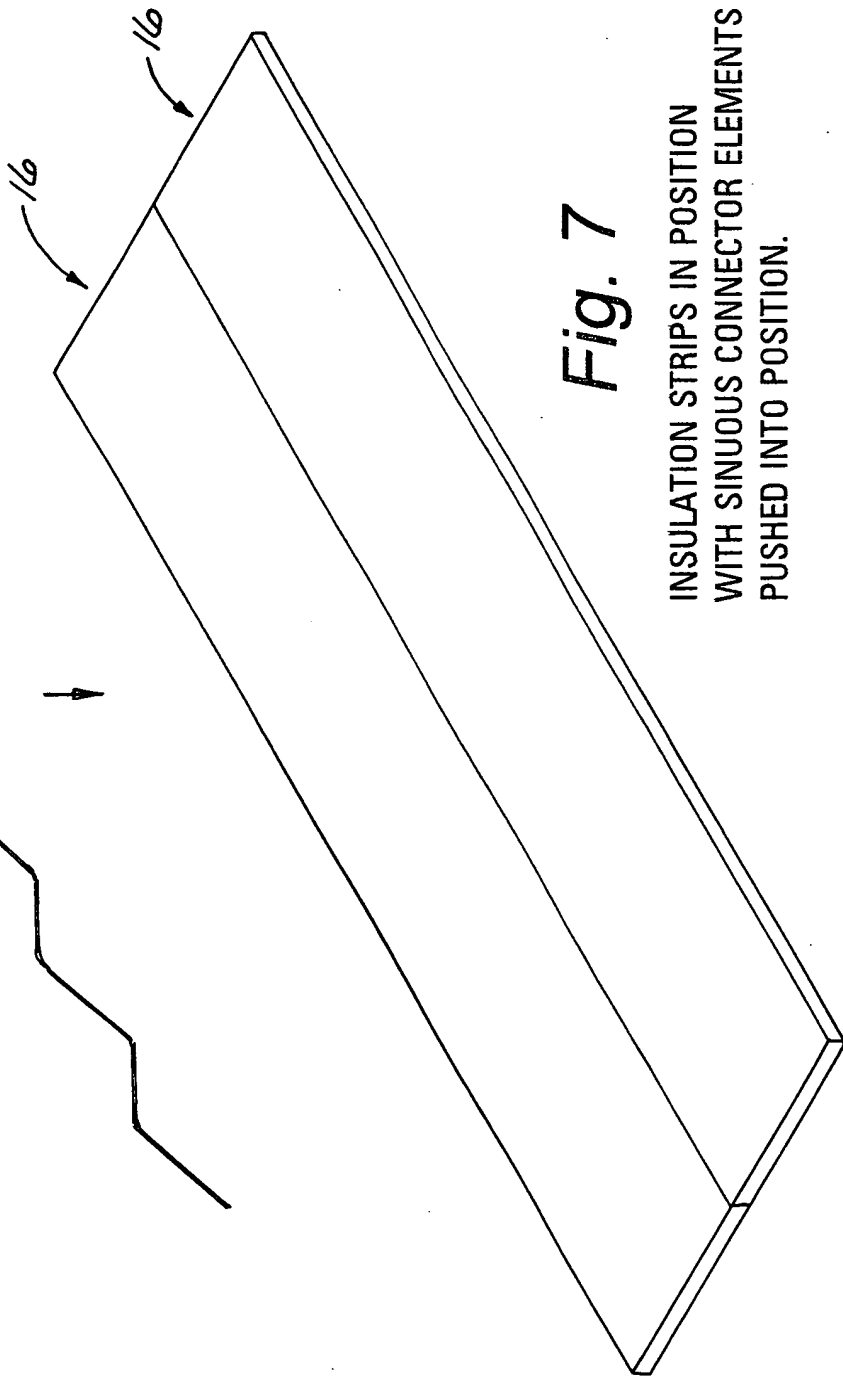


Fig. 7

INSULATION STRIPS IN POSITION
WITH SINUOUS CONNECTOR ELEMENTS
PUSHED INTO POSITION.

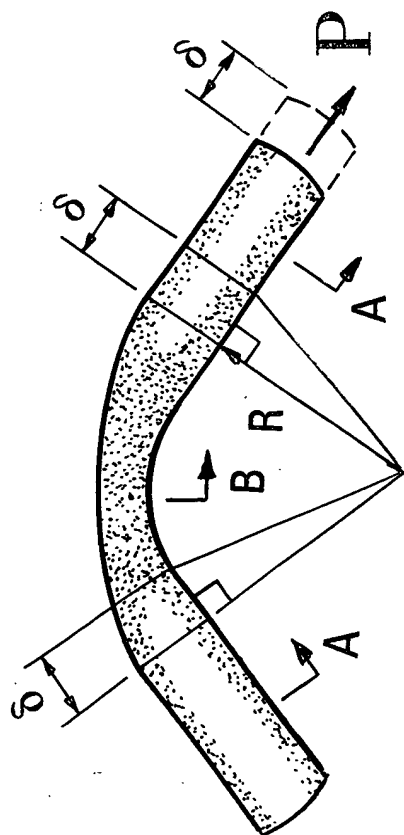

$$W_E = P \delta$$

$$W_I = \frac{2M \delta}{R}$$

$$W_E = W_I$$

$$\therefore P = \frac{2M}{R}$$

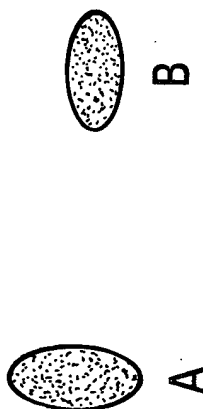


Fig. 8

BEND EFFECTS ON ANCHORAGE
AND PROFILE